


## Swiss binderless briguetting machines

## **Briquetting saw 06-V2**

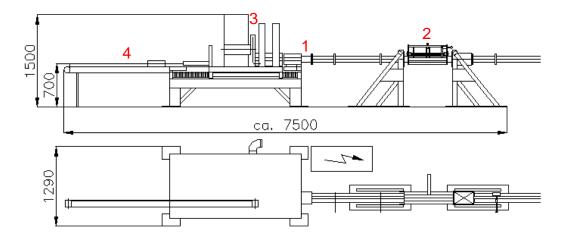

- 1 Supply
- 2 Switch with compensator
- Connection for the cooling line
- Safety mechanism in case of malfunctioning of the briquette saw Compensator needed when cooling line is longer then 45m
- 3 Saw blade
- 4 Outfeed conveyor
- Cut-off the logs
- Convey the logs out oft he saw -

## Technical specifications of the briquetting saw

| Capacity<br>Weight oft he briquetting saw | - 1'200<br>1'000 | kg/h<br>kg |                               |
|---|------------------|------------|-------------------------------|
| Dimension incl. switch                    | 7,50             | m          | length                        |
|   | 1,30             | m          | width                         |
|   | 1,50             | m          | height                        |
| Electrical supply data                    | 6                | kW         | saw engine (3x400/230V, 50Hz) |
| Compressed air                            | 60               | Nm3/h      | at 10 bar                     |
| Others                                    |                  |            | exhaust ventilation           |
| Environmental temperature                 | 10               | °C         | not below                     |

## Scope of delivery

- 1 Switch with compensator (Compensator when cooling line is longer then 45m)
- Saw blade 1
- Out feed conveyor 1
- Electric control panel 1